REV	DESCRIPTION	BY	DATE	APR
A	PRODUCTION RELEASE ECN 1280	WH	7/21/2002	JH
B	ECN 15082	CSM	5/26/2006	PER

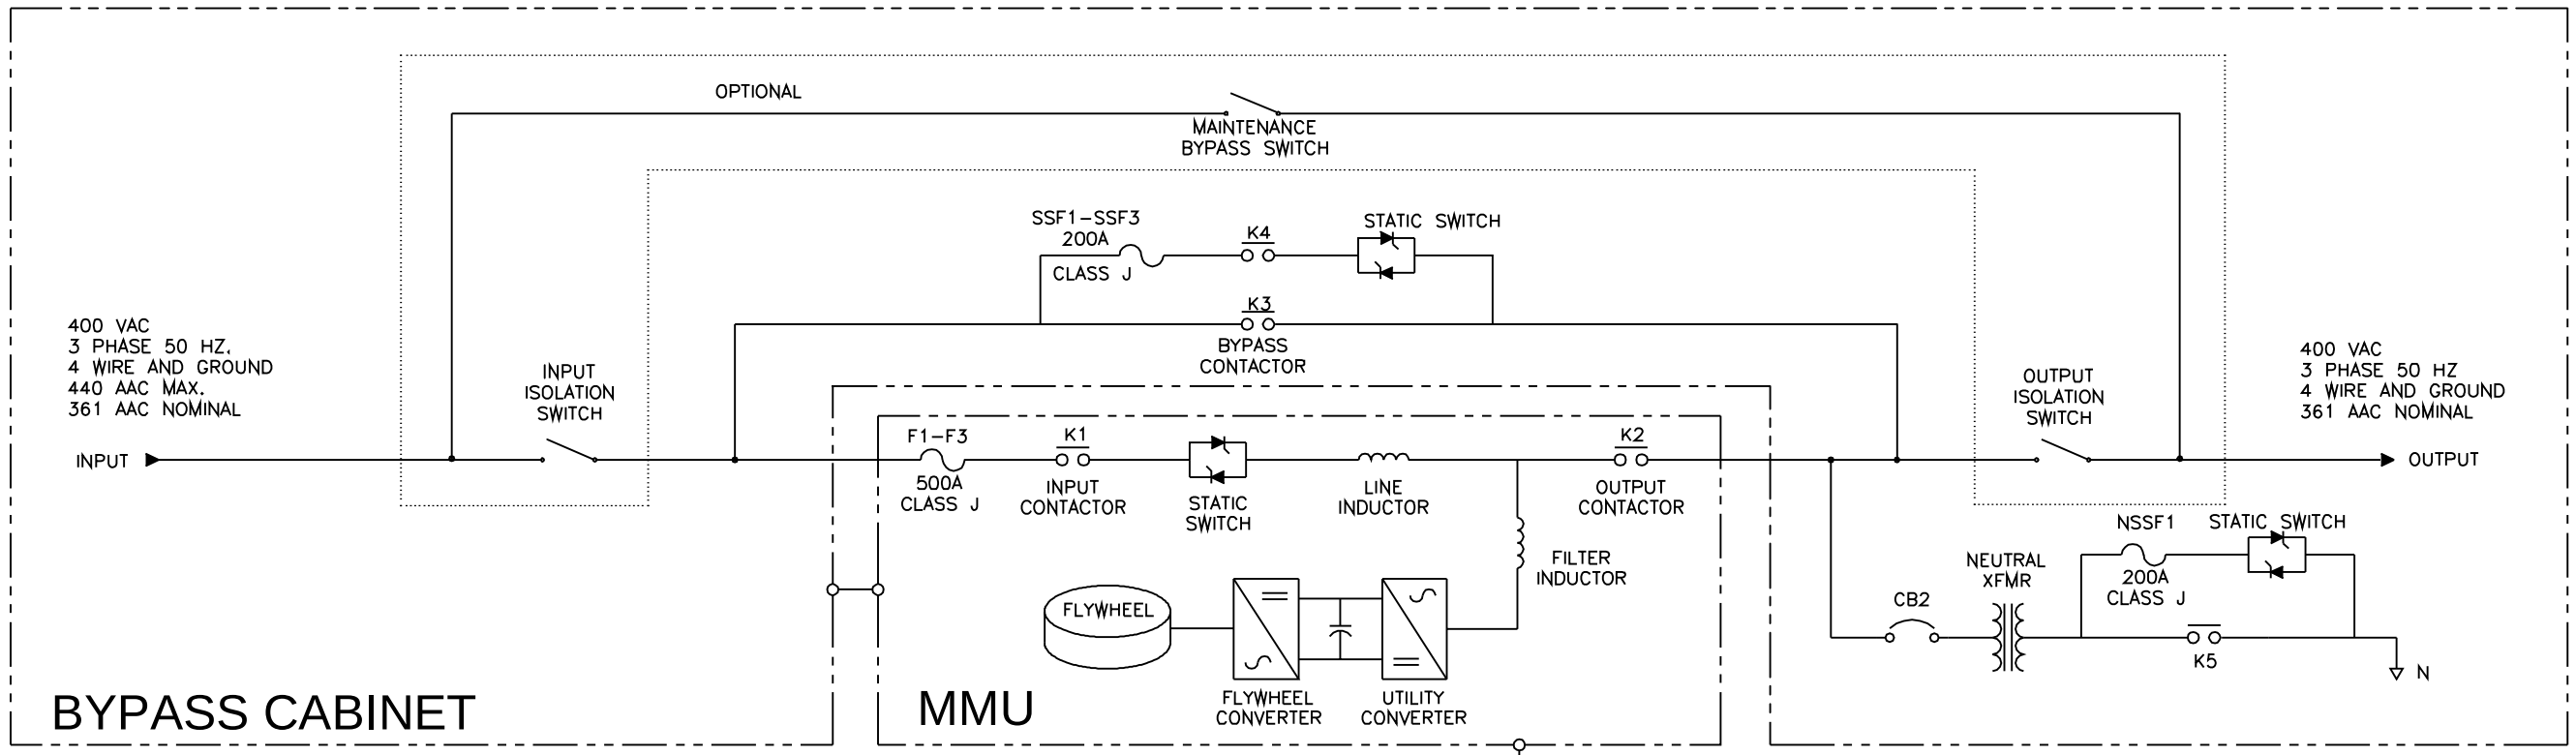

CUSTOMER MONITORING CONNECTION

CUSTOMER INTERFACE	(OPTIONAL) CUSTOMER SUPPLIED
24–12 AWG EPO–4 WIRES, INPUT CONTACTS–12 WIRES, OUTPUT CONTACTS–18 WIRES RJ45 6–PIN (MODEM) RJ45 8–PIN (NETWORK) DB9 (SERIAL)	

ACTIVE POWER, INC. CONFIDENTIAL: THIS DOCUMENT AND THE INFORMATION CONTAINED IN IT ARE CONFIDENTIAL, AND CANNOT BE COPIED OR DISCLOSED IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF ACTIVE POWER, INC.

THIRD ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS IN INCHES & INCLUDE FINISH. REMOVE BURRS AND SHARP EDGES. TOLERANCES ARE:
.XX: ±.03
.XXX: ±.010
ANGLES: ±.5°

MATERIAL: SEE NOTES
FINISH: SEE NOTES

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN WH	7/30/2002
CHECKED	
ENGR JH	7/30/2002
MFG	

ACTIVE POWER, INC AUSTIN TEXAS

TITLE: SUB DRW, 1-LINE, CS UPS250I, 4W

SIZE D | DWG NO 67038-AP | REV B

SCALE NONE | SHEET 1 OF 1