




***** GENERAL CONSTRUCTION *****

MODIFIED ISO CONTAINER
3mm FLOOR PLATES OVER TIMBER FLOORS
100mm MINERAL WOOL TREATMENT ENGINE
COMPARTMENT AND 50mm UPS
0.7mm PERF AND 1.2mm INNER SKIN ZINTEC
TRAYS


EXTERNAL WALL & ROOF COLOUR: BLACK
INTERNAL WALL & ROOF COLOUR: WHITE
FLOOR INTERNAL COLOUR: BLACK NON SLIP.
FLOOR UNDERSIDE COLOUR: BLACK
UNDERSEAL.

NOISE LEVEL 85db(A) @ 1mtr
8hr DAY TANK AT 75% LOAD

INNER FACE OF END
DOORS TO BE PACKED
WITH MINERAL WOOL
BETWEEN
CORRUGATIONS AND
RETAINED WITH
MELINEY & PERF.

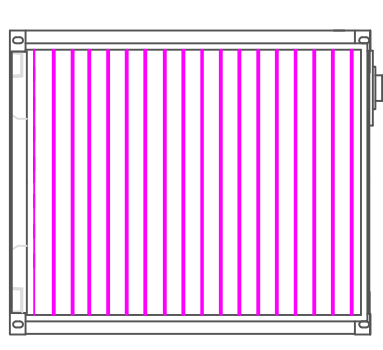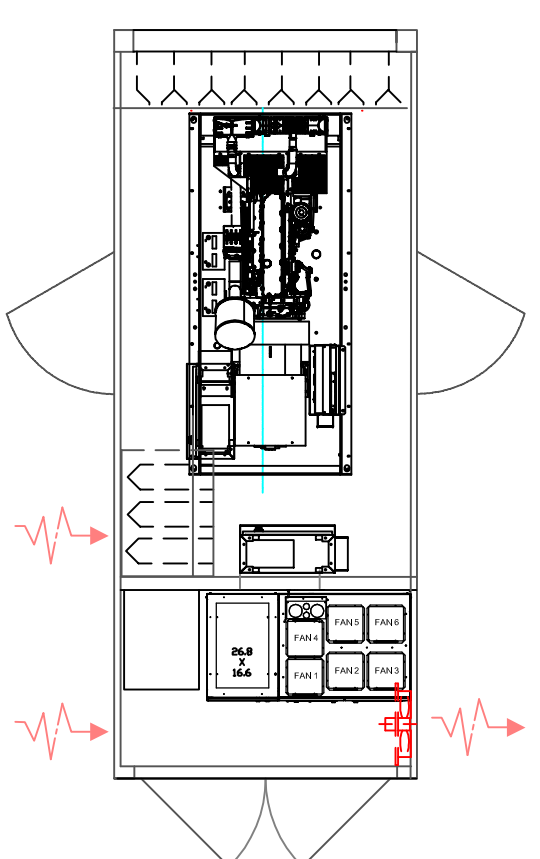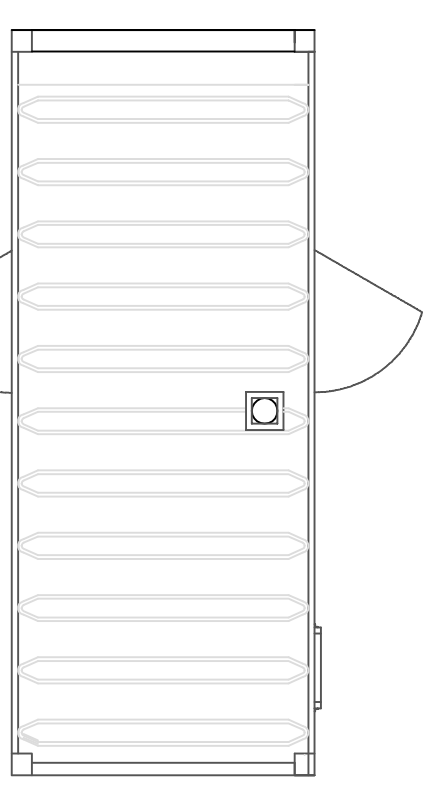


EXHAUST OUTLET C/W RAIN CAP

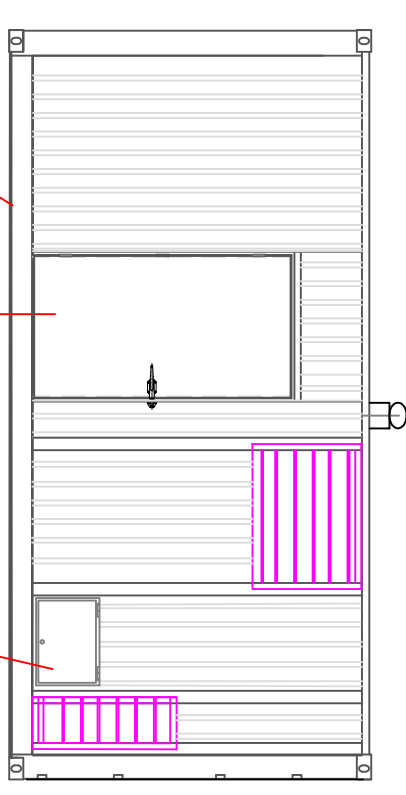

STRENGTHENING STRIP UNDER CONTAINER SIDE CHANNELS

DOOR & FRAME SET C/V SLANT FASTENER WITH INTERNAL PANIC RELEASE & CHECK STRAP BOLTED INTO RHS APERTURE.

INPUT/OUTPUT CABLING CONNECTION POINT

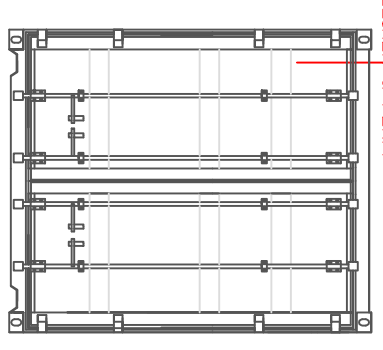

THIS IS NOT A DESIGN DRAWING AND IS ISSUED FOR INFORMATION ONLY.

<small>THIS DOCUMENT IS THE PROPERTY OF ACTIVE POWER. IT IS TO BE USED ONLY FOR THE PROJECT AND SITE SPECIFICALLY IDENTIFIED IN THE DRAWING. IT IS NOT TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. WITHOUT THE WRITTEN PERMISSION OF ACTIVE POWER.</small>	
	Itemed / Quantity / Title/Name, designation, material, dimension etc / Drawn By / Checked by / Approved by - date / Filename / Date / Article No./Reference / Edition / Sheet / V/L
	200KW POWERHOUSE / AP308999-014 / B / 1/4